



PULLER ATTACHMENT

FOR INDUSTRIAL SEWING MACHINES



MAKING SEWING EASY!

LUNEX PULLER ATTACHMENT



LX-6G

STEP INTO THE ELECTRONIC TUG



Suitable for:
flat sewing machine, double needle machine, chain car, synchronous car, thick material machine, etc

Product features:
To solve the fabric sewing is not smooth, not smooth, fabric slip, up and down wrong layer and other problems. Improve fabric sewing quality and workers sewing efficiency. Lift foot and reverse sewing signal can be perfectly adapted to all sewing equipment, and can solve the problem of long and narrow belt easy to break and troublesome replacement belt.

Installation form:
fixed body

Lifting mode	Rubber wheel specifications (outer diameter * width)	Suitable fabric	Driving mode	Lifting distance	Electric control
Automatic	4042 (standard) /4032/4022	Thin material, medium material, thick material	Stepper motor	16MM	AC100V-240V

LX-5G

STEP INTO THE ELECTRONIC TUG



Suitable for:
flat sewing machine, double needle machine, chain car, synchronous car, thick material machine, etc

Product features:
To solve the fabric sewing is not smooth, not smooth, fabric slip, up and down wrong layer and other problems. Improve fabric sewing quality and workers sewing efficiency, lift foot, reverse sewing signals can be perfectly adapted to all sewing equipment.

Installation form:
fixed body

Lifting mode	Rubber wheel specifications (outer diameter * width)	Suitable fabric	Driving mode	Lifting distance	Electric control
Automatic	4042 (standard) /4032/4022	Thin material, medium material, thick material	Stepper motor	16MM	AC100V-240V

LX-SD

FRONT PULL COMPUTER STEPPER TAPE TURNING MACHINE



Suitable for:
overlock sewing machine, stretch sewing machine, single needle, double needle, chain machine, etc

Product features:
LX-SD series electronic pull-out machine with double screen, high precision, easy installation, strong applicability. With large torque stepper motor, upper and lower wheel separate power, one key start and stop, automatic counting, and has an autonomous control system, synchronization effect is more accurate. Machine environmental protection and energy saving, when the equipment stops, the lab motor stops working to avoid stepper motor burning and save electricity. It can be optional to add automatic wire break, automatic stop and other functions.

Installation form:
fixed on the platform

Lifting mode	Rubber wheel specifications (outer diameter * width)	Suitable fabric	Driving mode	Lifting distance	Electric control
Manual/automatic	Top wheel 5550 (standard) /5540 Bottom wheel 2580 (standard) /2560	Thin material, medium material, thick material	Two-wheel drive	Manual 20MM/ automatic 16MM	AC100V-240V

LX-PL

FOR SINGLE OR TWIN NEEDLES MACHINES



Suitable for:
flat car (single needle) double needle, chain car, synchronous car, etc

Product features:
The mechanical structure of the synchronous belt is connected with the sewing machine, which can achieve the complete synchronization of the machine needle, the roller rotation, the needle under the machine needle and the roller pause, solve the problems of fabric wrinkling and tooth feeding, improve the sewing efficiency and improve the sewing quality.

Installation form:
fixed body

Lifting mode	Rubber wheel specifications (outer diameter * width)	Suitable fabric	Driving mode	Lifting distance	Electric control
Manual/automatic	5550 (standard) /5515/5525	Thin material, medium material, thick material	Single wheel drive	Manual 20MM/ automatic 16MM	AC220V/AC380V




LUNEX

LUNEX PULLER ATTACHMENT

LX-SP

FRONT PULL TAPE TURNING MACHINE

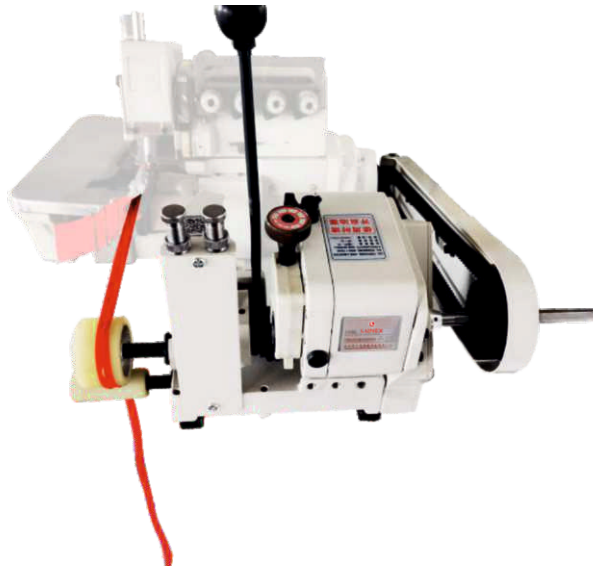

Suitable for:
overlock sewing machine


Product features:
front pull (special for pasta) strip turning machine, automatic pull material, reduce labor, improve efficiency, through the feeding device and pull cylinder with the sewing completed fabric instead of manual pull out.

Installation form:
Clamping type: fixed at the front and rear of the table

Lifting mode	Rubber wheel specifications (outer diameter * width)	Suitable fabric	Driving mode	Lifting distance	Electric control
Manual/automatic	Top wheel 5540 (standard) /5550 Bottom wheel 2560 (standard) /2580	Thin material, medium material, thick material	Two-wheel drive	Manual 20MM/ automatic 16MM	AC220V/AC380V

LX-TFS25

SIDE TAPE FEEDER

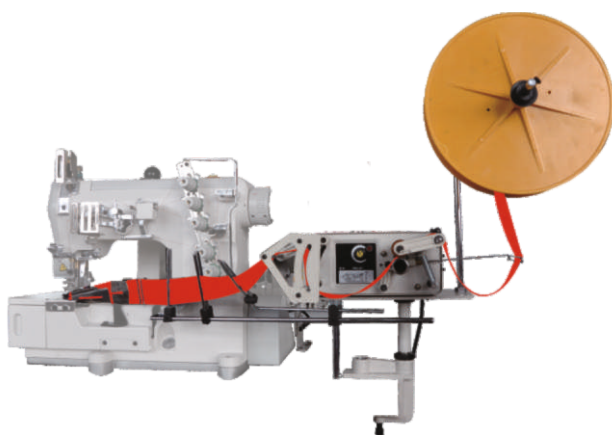

Suitable for:
Universal all sewing machines

Product features:
This electronic belt feeding device has a beautiful appearance and is fixed on the table. The equipment uses imported electronic components and dual The circuit board of the panel improves the quality of the equipment. When the rolling strip you need to sew is too wide and the rolling strip is curled Wait, this machine can solve the curling problem, reduce manual work intensity, and improve work efficiency by 2 times

Belt size: 70mm

Installation form:Fixed platform

Conveying form: Tension-free conveying



MANDAKINI TRADING CO.

Noida Office: B-100, Sector-69, Transport Nagar,
Noida, U.P. 201301. Ph: 120-4555230, 98103 03397

Gurugram Office: Shankar Chowk Road, Near Indian Overseas Bank
Vill & P.O. Dundaheera, Gurugram. Ph: 124-2438131, 95992 03397